



NOVUM

Redefining refrigeration

PANAMA SLIM Technical Specifications







www.novum.ie




Technical Specifications

		3 Door	2 Door
Technical Data			
Gross content	cu. ft. (litre)	68.15 (1930)	47.32 (1340)
Net Content	cu. ft. (litre)	58.26 (1650)	37.78 (1070)
Total Display Area (TDA)	sq. ft. (m2)	29.7 (2.76)	19.37 (1.80)
Ambient Temperature Range	°F (°C)	+61 to +77 (+16 to +25)	+61 to +77 (+16 to +25)
Inner Temperature Range	°F (°C)	0 to -13 (-18 to -25)	0 to -13 (-18 to -25)
Sound Pressure at 1m Distance	dB(A)	48	48
Electrical Data			
Nominal Voltage / Frequency	V / Hz	220-240 / 50	220-240 / 50
Nominal Power Cabinet	w	1450	967
Nominal Power LED Light	w	6 x 14	4 x 14
Nominal Current	A	12.6	8.0
Fuse Protection	A	13	13
Energy Consumption at 77°F (25°C)	kWh/24h	18.17	12.11
Length of Power Supply Cord	Inches (mm)	79 (2006)	79 (2006)
Refrigeration Data			
Refrigerant	Type	R290	R290
Gas Charge	oz (g)	3x 2.3 (3 x 65g)	3x 2.3 (3 x 65g)
Maximum Operating Pressure	PSI (bar)	435 (30)	435 (30)
Maximum Heat Output	W/h (BTU)	1800 (6140)	1200 (4100)
Dimensions			
Length Outside/ Inside	Inches (mm)	90.55/84.64 (2300/2150)	60.43 /54.84 (1535/1393)
Depth Outside/ Inside	Inches (mm)	31.49/22.55 (800/573)	31.49/22.55 (800/573)
Depth of shelves	Inches (mm)	19.96 (507)	19.96 (507)
Number of shelves (per door)	No..	4	4
Weight			
Net Weight (excl. packaging, incl. internal accessories)	Lbs (Kg)	870 (395)	626 (284)
Gross Weight (incl. packaging & internal accessories)	Lbs (Kg)	904 (410)	648 (294)

Panama Slim External Dimensions - 2 door and 3 door

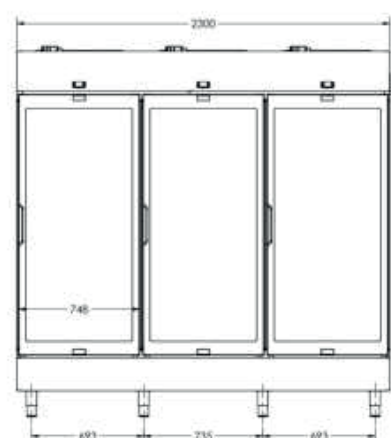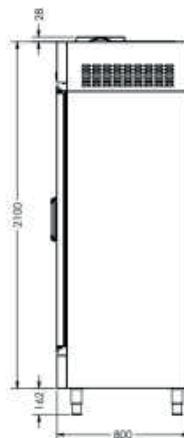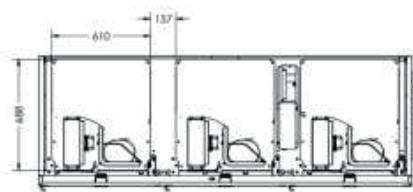

Panama Slim Internal Dimensions

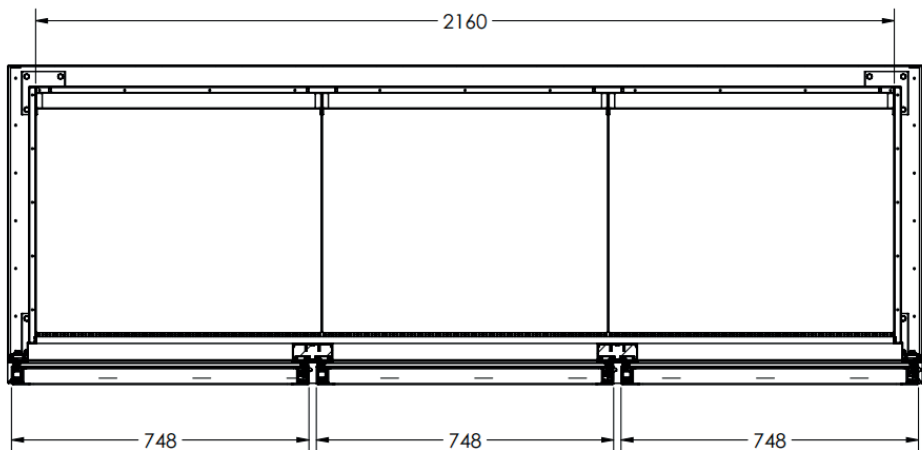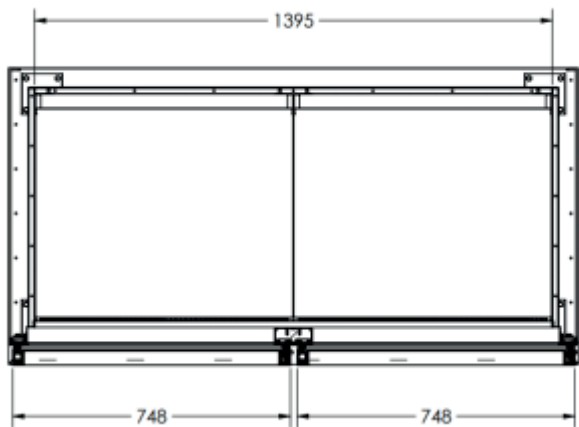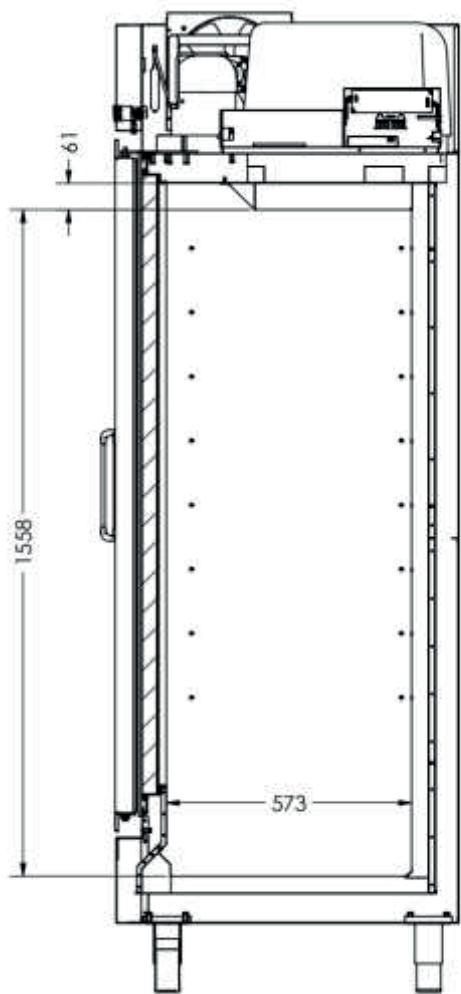

Novum (Overseas) Ltd.

The Novum Building
Clonshaugh Technology & Business Park
Dublin 17, Ireland

+353 1 803 6400
www.novum.ie

NOVUM
Redefining refrigeration