


NOVUM LEAPTM

GC



GC

TECHNICAL SPECIFICATIONS

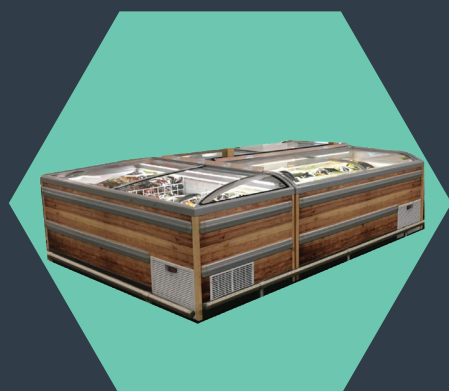

NOVUM
Redefining refrigeration

WWW.NOVUM.IE

Novum LEAP™ Grand Cayman 2.1m



These are some of the latest and most popular Novum innovations. They were developed from the ground up to incorporate Novum's LEAP™ technology. The benefits of which are clear - No frost build up internally unique cassette refrigeration system & the lowest running costs of any cabinet of its size on the market.

The Grand Cayman combines superior internal volume, with excellent product visibility & product facing. Dual LED lighting, combined with a clean white interior provides spectacular illumination of the product. This combined with Novum's LEAP™ Technology, makes a truly class leading cabinet. This state-of-the-art ultra- low energy cabinet is available in 2.1m length.



NOVUM
LEAP™
GC



Removable Cassette



LED options available



Dual Temperature



Lower Energy Bills



100% Frost Free

The unique curved glass on the end case offers an unequalled access into the cabinet. In practice, this means that the front corner of the cabinet can easily be shopped. The Novum Grand Cayman range is guaranteed to enhance the image of your store, save you money and improve your customer shopping experience.







It is a versatile cabinet that can be used as a stand-alone unit, as part of a line-up, back-to-back or as part of a full island and is available with sliding lids.

TECHNICAL SPECIFICATION

Grand Cayman Range	Model	In-Line 2.1m	End of Aisle 2.1m
Technical Data			
Gross content	cu. ft. (litre)	37.7 (1068)	37.7 (1068)
Net Content according to EN 23953	cu. ft. (litre)	29.3 (830)	29.3 (830)
Total Display Area (TDA)	sq. ft. (m2)	16.8 (1.55)	16.1 (1.5)
Ambient Temperature Range	°F (°C)	+61 to +77 (+16 to +25)	+61 to +77 (+16 to +25)
Inner Temperature Range	°F (°C)	0 to -13 (-18 to -25)	0 to -13 (-18 to -25)
Sound Pressure at 1m Distance	dB(A)	43.3	43.3
Electrical Data			
Nominal Voltage / Frequency	V / Hz	110-120 / 60	110-120 / 60
Nominal Power Cabinet	w	310	310
Nominal Power LED Light*	w	19W	19W
Nominal Current	A	5	5
Fuse Protection	A	10	10
Energy Consumption at 77°F (25°C) without LED's	kWh/24h	4.15	4.15
Length of Power Supply Cord	Inches (mm)	78.7 (2000)	78.7 (2000)
Refrigeration Data			
Refrigerant	Type	R290	R290
Gas Charge	oz (g)	2.3 (65g)	2.3 (65g)
Maximum Operating Pressure	PSI (bar)	435 (30)	435 (30)
Net Average Heat Output Watts (BTU)	Watts (BTU)	173 (590)	173 (590)
Dimensions			
Length Outside/ Inside	Inches (mm)	83/75.7 (2108/1925)	83/75.7 (2108/1925)
Depth Outside/ Inside	Inches (mm)	38.5/31.6 (978/803)	38.5/31.6 (978/803)
Front Access Height Outside / Inside	Inches (mm)	31.02/34.80 (788/884)	31.02/34.80 (788/884)
Stacking Height at the Front / Back	Inches (mm)	22.80(580)	22.80(580)
Weight			
Net Weight (excl. packaging, incl. internal accessories)	Lbs (Kg)	308.6(140)	308.6(140)
Gross Weight (incl. packaging & internal accessories)	Lbs (Kg)	330.7(150)	330.7(150)

* 1 of 2 options LED available

Dimensions Grand Cayman 2.1m

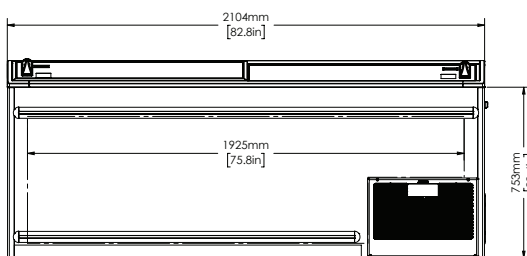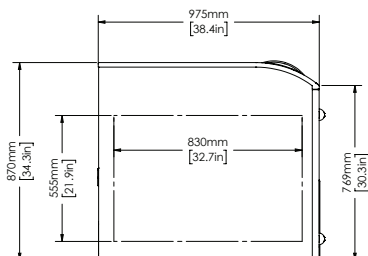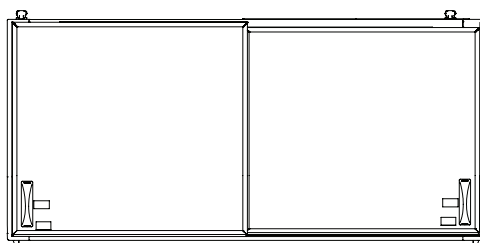

NOVUM LEAPTM

GC

NOVUM
Redefining refrigeration

Novum (Overseas) Ltd.
The Novum Building
Clonshaugh Technology & Business Park
Dublin 17, Ireland

+353 1 803 6400
www.novum.ie